



亿阳机械  
KINGSUN MACHINERY

**WENZHOU KINGSUN MACHINERY INDUSTRIAL CO.,LTD**

ADD: No.1002 Heyuan Mansion, Xincheng, Wenzhou, China


TEL: 0086-577-88902233 88939966

FAX: 0086-577-88956033 88905677

E-mail: sales02@kingsunmachinery.com

Http: www.chinapackingmachinery.com www.kingsunmachinery.com

## DBA-200 Automatic Strapping Machine

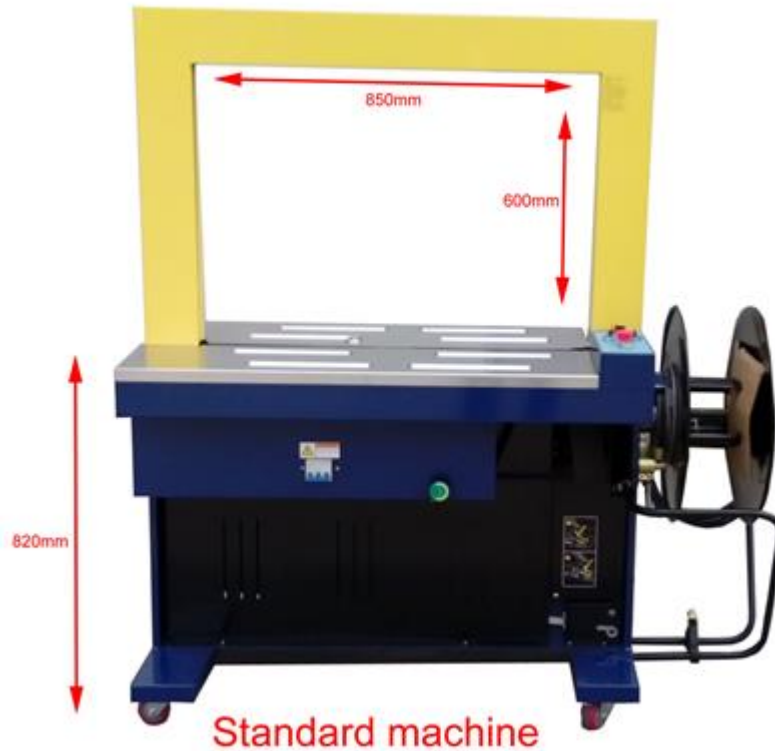

### Product Feature

DBA-200 Automatic Strapping Machine, strapping machine is the most general-purpose type, featuring a high strapping speed and a low failure rate. The amount of strap storage can be freely adjusted based on the dimensions of the bow frame and the dimensions can also be selected freely according to the customer's needs.

### Application:

Oiling is completely unnecessary, which simplifies maintenance.

Style of bundling: Single and multiple band parallel binding, both manual and automatic continuous bundling, spherical switch, foot switch.

### Technical Parameters:

No.	Items	Parameters
1	Voltage	220V/50HZ, 1P or 380V/50HZ, 3P
2	Packing material	Polypropylene tape: PP
3	Packing speed	2.5S/bar
4	Baler work surface height	820mm (including four wheels)
5	Arch Size	Width: 550~2850mm; Height: 250~1800mm (standard size 850W x 600H)

6	The method of bonding	Hot melt method
7	Hot sticky mode	bottom
8	Hot head position	The middle of the table
9	Strapping way	Parallel 1 - multi-channel, manual, automatic continuous play, ball switch, foot switch
10	Applicable packing tape	9-15( $\pm 0.1$ )mm wide and 0.6-1.0( $\pm 0.1$ )mm thick (optional)
11	Hot sticky deviation	$\leq 2$ mm
12	Ambient temperature	0 ℃-50 ℃
13	Environmental humidity	<99%
14	Operating noise	$\leq 75$ dB
15	Take-up tension	> 600 Newtons
16	Hot sticking force	>800 Newton
17	Hot sticky adhesive length	$\geq 20$ mm
18	Dimensions	1410 X 600 X 1540 (arch width 850 x height 600)
19	Electrical control	DSI controller "DSI" motor, "dsi" proximity switch.
20	Storage box placement	Bottom of the fuselage
21	main material	Magnesium alloy









