
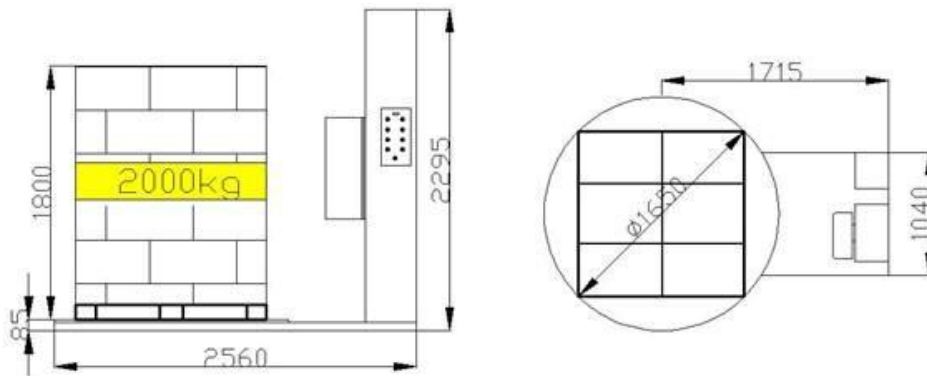


T1650F Automatic Pre-Stretch Pallet Wrapping Machine

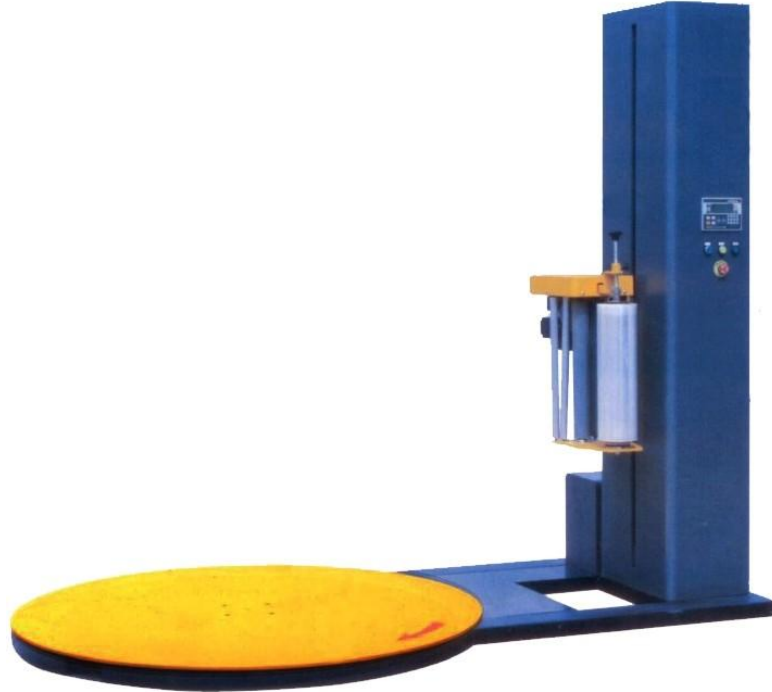

Quotation:

Product Feature

Stretch wrapping machines are used to wrap stretch film around a loaded pallet. Film provides extra support while the products are being transported to protect them from tip, spill or from being damaged. Additionally, wrapped loads can easily be separated and identified. Stretch pallet wrapper is widely used in chemical industry electronic industry building materials home appliances papermaking foodstuff and drink etc.

Technical Specification

Model	T1650F
-------	--------

Wrapping Size(L×W)(mm)	(500-1200) ×(500-1200)
Wrapping Height(mm)	L Type:(800-2000) / H Type:(800-2400)
Wrapping Efficiency(loads/hour)	20-40
Turntable Speed(rpm/min)	3 - 12
Turntable Diameter(mm)	Φ: 1650 / H: 85
Turntable Loading(max)(kg)	2000
Electrical Requirement	Single Phase 220V / 50HZ / 20A
Power(kw)	Turntable:0.75; Film Carriage:0.4; Steel Tower:0.37
Film Carriage	Pre-Stretch Type
Machine Weight(kg)	900
Machine Dimension(mm)	L Type:2545×1650×2280 / H Type: 3500×1800×980

Controls

PLC control
 Photo-eye pallet height sensor
 0-9 separate top, bottom and up-down wrap count selectors
 Photo-eye sensing delay
 Reinforce wrap allow more wrap on same location
 Film Tension Control adjustment on the panel
 3-12 RPM variable carriage up-down speed
 Cycle pause capability
 Separate start, reset and emergency stop buttons
 Manual carriage up-down switch
 Turntable jog button

Turntable

1650mm Diameter Structural Steel Plate
 85mm low profile turntable
 Soft start, soft stop
 Heavy duty chain drive


Film carriage

Powered pre-stretch system up to 200% to min film consumption (Pre-stretch ratio can be Specially made according your requirements.)
 Carriage door opens for effortless roll change and thread film
 Film delivery variable speed by separate DC Drive Motor
 Film dancer-bar with variable speed output
 Heavy duty double-chain carriage lift, calm and safety

Other

Hinged mast for easy handling
 Rear Forklift transportable

Options as below:

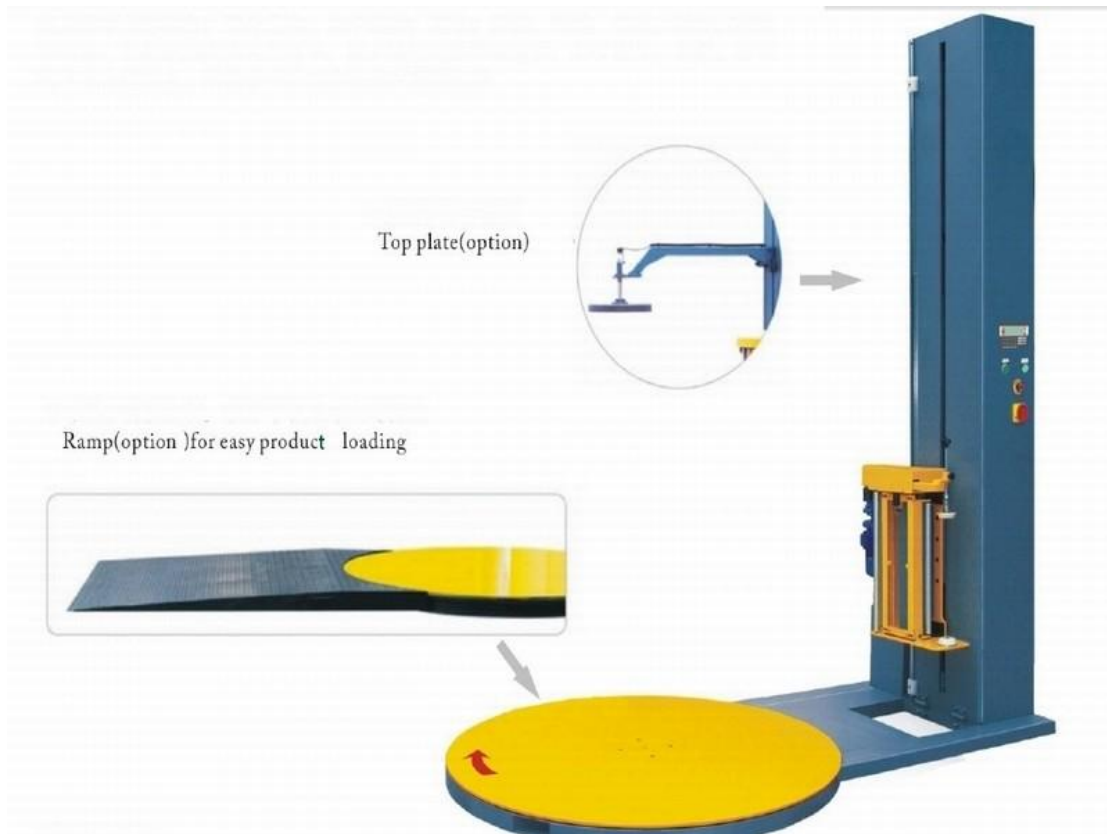

Ramp

Pneumatic top plate

Pneumatic film grabs and cut off system

H type with packing height: 2400mm

Turntable diameter: 1800mm, 2000mm


Turntable capacity: 2500kgs, 3000kgs

Machine color

Control panel



Electric wiring connection

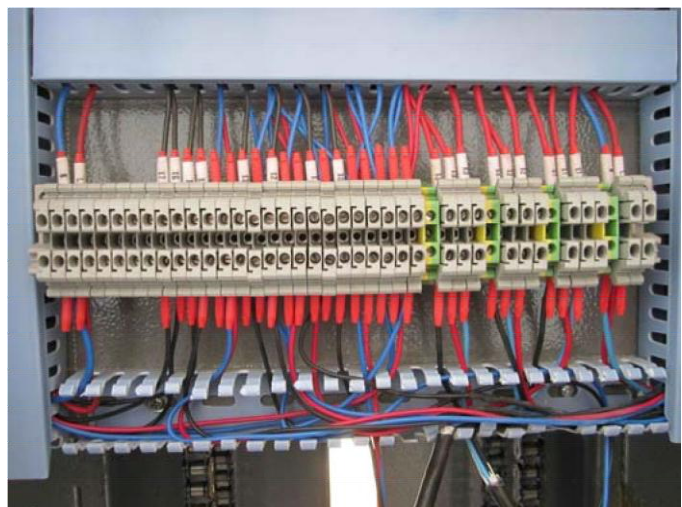

Actual machine photo



Electric control box inside



Packing inside



Finished packing

